

PM-K

metering dosing pumps (constant flow rate)

**Metering dosing pumps PM – K series
Constant flow rate.**



- Led power-on
 - Led pulse solenoid
 - Knob flow rate percentage adjustment
 - Double range regulation
 - Keys max frequency selection (100% or 20%)
 - Start and Stop Keys
 - Plastic box IP65 protection degree



MICON
measure technology

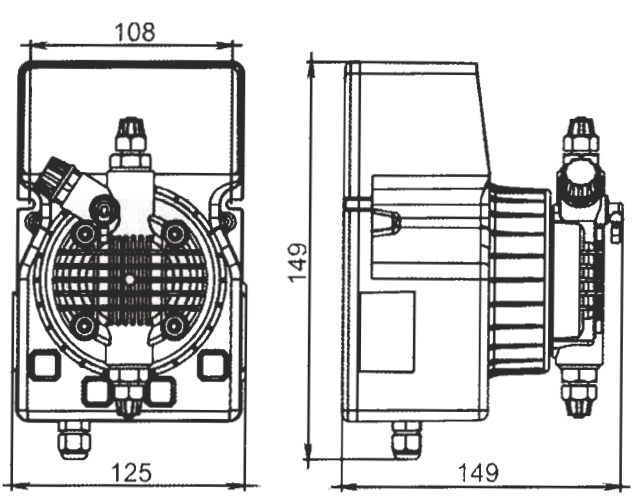
Measure and control instruments for water treatment

PM-K

metering dosing pumps (constant flow rate)

Model	Flow rate max (l/h)	Pressure max (bar)	Frequency max (imp/min)	ml/pulse	Max suction high (m)	Standard power supply (*)	Weight (kg)
PM 01-15	1	15	120	0,14	2.0	230 V – 50/60 Hz	2,3
PM 02-10	2	10	100	0,33	2.0	230 V – 50/60 Hz	2,3
PM 05-07	5	7	100	0,83	2.0	230 V – 50/60 Hz	2,3
PM 08-10	8	10	120	1,11	2.0	230 V – 50/60 Hz	2,9
PM 20-03	20	3	120	2,60	2.0	230 V – 50/60 Hz	2,9

(*) Other power supply contact the headquarters

Dimensions	Materials
	<p>Pump head: polypropylene (on request: PVC, SS316, PTFE, PVDF)</p> <p>Diaphragm: PTFE</p> <p>Connections: polypropylene</p> <p>Foot filter: polypropylene</p> <p>Injection valve: polypropylene</p> <p>Suction tube: PVC crystal</p> <p>Delivery tube: polyethylene</p> <p>Lip valves (standard): FPM (on request: silicon, EPDM, NBR)</p> <p>Ball valves (on request): Pyrex, Kalretz, SS316</p> <p>Seat: FPM (on request: silicon, EPDM, PTFE, NBR)</p>



MICON
Via Trento, 11
02015 Cittaducale (RI)

Tel.: +39.0746.601222

Fax: +39.0746.690121

Web site: www.micon.it

Email: info@micon.it

